




Butt Weld Cap

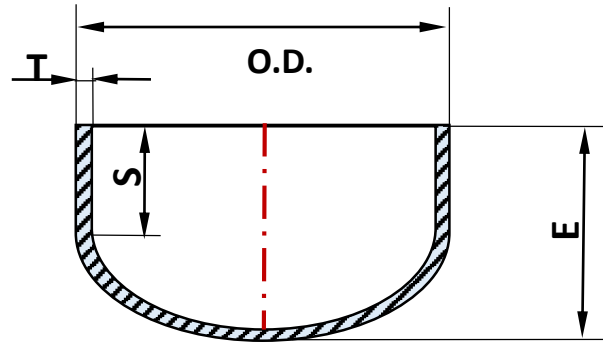

Nominal Pipe Size (DN)	Outside Diameter (O.D.)	Length [E]	Tangent Length (S)	Schedule 10S		Schedule 40S		Schedule 80S	
				Wall thickness (T)	Approx. weight (kg)	Wall thickness (T)	Approx. weight (kg)	Wall thickness (T)	Approx. weight (kg)
½	21.34	25	18.80	2.11	0.04	2.77	0.05	3.73	0.05
¾	26.67	25	17.27	2.11	0.05	2.87	0.06	3.91	0.06
1	33.40	40	27.94	2.77	0.09	3.38	0.13	4.55	0.13
1¼	42.16	40	25.91	2.77	0.13	3.56	0.17	4.85	0.18
1½	48.26	40	24.13	2.77	0.14	3.68	0.23	5.08	0.24
2	60.33	40	21.08	2.77	0.17	3.91	0.27	5.54	0.34
2½	73.03	40	17.27	3.05	0.25	5.16	0.45	7.01	0.51
3	88.90	50	25.91	3.05	0.40	5.49	0.71	7.62	0.85
3½	101.60	65	35.56	3.05	0.57	5.74	1.02	8.08	1.13
4	114.30	65	32.00	3.05	0.65	6.02	1.22	8.56	1.61
5	141.30	80	37.59	3.40	1.02	6.55	1.84	9.53	2.55
6	168.28	90	43.18	3.40	1.36	7.11	3.23	10.97	4.54
8	219.08	100	42.67	3.76	2.49	8.18	5.67	12.70	7.43
10	273.05	125	54.10	4.19	4.90	9.27	9.21	12.70	12.38
12	323.85	150	66.80	4.57	6.53	9.53	13.06	12.70	16.60
14	355.60	165	71.37	4.78	8.16	9.53	16.19	12.70	21.77
16	406.40	175	71.37	4.78	14.51	9.53	22.00	12.70	29.48
18	457.20	200	84.07	4.78	17.96	9.53	26.94	12.70	35.92
20	508.00	225	96.52	5.54	27.22	9.53	34.02	12.70	39.92
24	609.60	265	109.47	6.35	34.47	9.53	44.45	12.70	61.23