


Butt Weld Straight Tee

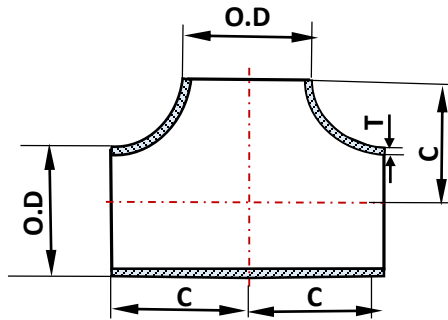

Nominal pipe size	Outside diameter (O.D)	Center to send (C)	Schedule 10S		Schedule 40S		Schedule 80S	
			Wall thickness (T)	Approx. weight (kg)	Wall thickness (T)	Approx. weight (kg)	Wall thickness (T)	Approx. weight (kg)
½"	21.34	25.40	2.11	0.10	2.77	0.10	3.73	0.14
¾"	26.67	28.58	2.11	0.13	2.87	0.17	3.91	0.20
1"	33.40	38.10	2.77	0.29	3.38	0.29	4.55	0.39
1¼"	42.16	47.63	2.77	0.50	3.56	0.59	4.85	0.68
1½"	48.26	57.15	2.77	0.68	3.68	0.86	5.08	1.02
2"	60.33	63.50	2.77	0.85	3.91	1.28	5.54	1.59
2½"	73.03	76.20	3.05	1.41	5.16	2.20	7.01	3.13
3"	88.90	85.73	3.05	1.77	5.49	3.31	7.62	4.45
3½"	101.60	95.25	3.05	2.67	5.74	4.08	8.08	5.44
4"	114.30	104.78	3.05	3.46	6.02	5.28	8.56	7.71
5"	141.30	123.83	3.40	6.10	6.55	9.41	9.53	11.34
6"	168.28	142.88	3.40	8.07	7.11	11.00	10.97	13.61
8"	219.08	177.80	3.76	15.65	8.18	20.91	12.70	28.12
10"	273.05	215.90	4.19	26.76	9.27	35.38	12.70	49.90
12"	323.85	254.00	4.57	39.46	9.53	62.14	12.70	83.91
14"	355.60	279.40	4.78	48.53	9.53	79.38	12.70	95.25
16"	406.40	304.80	4.78	58.97	9.53	99.79	12.70	120.20
18"	457.20	342.90	4.78	76.66	9.53	129.73	12.70	156.04
20"	508.00	381.00	5.54	103.42	9.53	162.39	12.70	195.04
24"	609.60	431.80	6.35	155.58	9.53	225.89	12.70	272.16